

Compact Vertical Laminar Flow Bench



Telstar Mini-V/PCR, The UltraCompact Vertical Flow Bench

A quiet blower delivers an ultra clean laminar airflow over the working bench to protect manipulated products from dust, from environment contamination and from cross contamination in the working area.

Vertical benches are ideal solution for the handling of non hazardous biological samples.

Moreover Telstar **Mini-V/PCR** features a built–in UV light with timer particularly suitable for PCR process to denaturate oligonucleotide contaminants.

General features

- Bench top cabinet with non recirculated vertical laminar flow.
- Compact dimensions compatible with all laboratory doors and dimensions.
- Epoxy powder coated finish zinctec steel cabinet.
- AISI 304 stainless steel work bench.
- H14 HEPA filter with 99,999 % efficiency for particles >0,3 micron easily accessible for replacement.
- Prefilter 85% ASHRAE, in the inlet side.
- Class 100 work station according to Fed. Std. 209 and BS 5295.

Technical data

As standard, **Mini-V/PCR** includes fluorescent light, built-in UVlight with timer, electrical socket in working area, stainless steel bench.

230V/50Hz (other voltage upon request).

External dimensions (W x D x H): 670 x 520 x 1.125 mm. Internal dimensions (W x D x H): 630 x 500 x 570 mm. Weight: 70 Kg.

Lighting > 750 lux / noise level: 56 dBA.

Options and accessories


- Gas or vacuum tap (1).
- Pipette holder (2).
- Front closure UV safe (3).
- Filter clogging alarm.
- Support table.




Control system

An intuitive electronic control system offers fast and complete control over all cabinet functions.

- Alphanumerical LCD display (1) indicates:
 - Airflow status: Full speed or half speed.
 - U.V. count down timer.
 - Total running hours of the cabinet and UV light running hours.
- Function scrolling keys (2).
- Full speed/half speed selection key with LED (3).
- Light ON/OFF key and LED (4).
- UV Light ON/OFF key and LED (5).
- Activation key of optional electrical equipment (6).
- Filter clogging alarm LED, optional (7).
- UV "ON" alarm LED, optional (8).



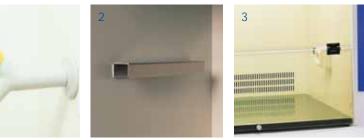

Distribué par :

w

LABORATOIRES HUMEAU

Z. A. de Gesvrine - 4 rue Képler - B. P. 4125 44241 La Chapelle-sur-Erdre Cedex - France t. : +33 (0)2 40 93 53 53 f. : +33 (0)2 40 93 41 00 e. : info@humeau.com

o m

ww.humeau