

CONDENSATE PUMPS

For air conditioning and refrigeration technology



more safety
more reliability
more Eckerle



Condensate pumps

With a float control and alarm-switch (except EE 600)

EE 600

Usage:

This float type pump is mainly used in air conditioners with a little spare space inside, e.g. wall mounted mini split and ceiling units. The small sensor can easily be adopted to the air conditioner's condensate drain hose.

For air conditioners up to 7.5 kW

pump
with a 2-level float switch sensor

Description:

The EE 600 system consists of a pump unit and a separate 2-level float switch sensor. It comes with mounting accessories like pads of double-sided Scotch Tape to fix the floater and an anti-shock mount for the pump unit.

Technical Data:

Pump unit (L x W x H): 77 x 32 x 50 mm
Electrical spec.: 230 V, 50/60 Hz, 18 VA
Sensor unit (L x W x H): 82 x 39 x 39 mm
Max. flow rate: 6 l/h
Max. delivery height: 6 m
Max. suction height: 1.5 m

NEW

EE 600



EE 1000

Usage:

This float type pump is mainly used in air conditioners with a little spare space inside, e.g. wall mounted mini split and ceiling units. The small sensor can easily be adopted to the air conditioner's condensate drain hose.

For air conditioners up to 10 kW

pump
with a 3-level float switch sensor

Description:

The EE 1000 system consists of a pump unit and a separate 3-level float switch sensor. Beside the on/off function the system offers a high level, potential free NO / NC alarm switch (230 V, 8 A ohmic load).

The system comes with mounting accessories like pads of double-sided Scotch Tape to fix the floater and an anti-shock mount for the pump unit.

Technical Data:

Pump unit (L x W x H): 77 x 35 x 62 mm
Electrical spec.: 230 V, 50/60 Hz, 18 VA
Sensor unit (L x W x H): 82 x 39 x 39 mm
Max. flow rate: 10 l/h
Max. delivery height: 10 m
Max. suction height: 2.5 m
Alarm switch: max. 230 V, 8 A (ohmic load)
NO / NC (normally open / normally closed)
Alarm: max. 23 mm

EE 1000



EE 1800

Usage:

This float type pump is mainly used in air conditioners with a little spare space inside, e.g. wall mounted mini split and ceiling units. The small sensor can easily be adopted to the air conditioner's condensate drain hose.

For air conditioners up to 18 kW

pump
with a 3-level float switch sensor

Description:

The EE 1800 system consists of a pump unit and a separate 3-level float switch sensor. Beside the on/off function the system offers a high level, potential free NO / NC alarm switch (230 V, 8 A ohmic load).

The system comes with mounting accessories like pads of double-sided Scotch Tape to fix the floater and an anti-shock mount for the pump unit.

Technical Data:

Pump unit (L x W x H): 77 x 35 x 62 mm
Electrical spec.: 230 V, 50/60 Hz, 18 VA
Sensor unit (L x W x H): 82 x 39 x 39 mm
Max. flow rate: 18 l/h
Max. delivery height: 10 m
Max. suction height: 2.5 m
Alarm switch: max. 230 V, 8 A (ohmic load)
NO / NC (normally open / normally closed)
Alarm: max. 23 mm*

NEW

EE 1800



EE 1200

Usage:

The EE 1200 has particularly been designed for direct installation into the Eckerle-duct-system. Equal to the other volumetric systems of Eckerle the EE 1200 comes with a high quality Swiss-made piston pump inside. These pumps were specially developed to deliver condensate water. They offer wide opening duck-bill-valves (non-sensitive against water borne contaminants) and furthermore they run remarkably quiet. These details arrange a pump system with a long-life-cycle. They provide a higher-than-average performance even at great delivery heights.

For air conditioners up to 10 kW

Condensate pump with duct with a 3-level float switch sensor

Description:

The EE 1200 comes in a set with a duct, an elbow, a ceiling seal and installation accessories. On request a special moulded foam part is available for different duct brands. This provides an easy mounting into pre-existing ducts.

Technical Data:

Pump unit (L x W x H): 78 x 42 x 46 mm
Electrical spec.: 230 V, 50 Hz, 18 VA
Sensor unit (L x W x H): 82 x 39 x 39 mm
Max. flow rate: 8 l/h
Max. delivery height: 6 m
Alarm switch: max. 230 V, 8 A (ohmic load)
NO / NC (normally open / normally closed)

EE 1200



Condensate pumps

With a float control and alarm-switch (except EE 150)

EE 1750^M

For air conditioners up to 30 kW

Pump
with a 3-level float switch sensor

Usage:

This float type pump is used in conjunction with air conditioners which have condensate collection tanks with an outlet on the drainage pipework: Cassette, ceiling unit, split, fan convectors.


Description:

The EE 1750^M comprises a pump unit and a 3-level float switch sensor. The float switch controls On, Off and Alarm conditions.

The float switch unit is fixed to the tank outlet or to a pipe end, it is connected to the pump unit by a 1.5 m/5 ft long pipe and cable (an optional extension is available).

Technical Data:

Pump unit (L x W x H): 100 x 81.5 x 67 mm
Electrical spec.: 230 V, 50/60 Hz, 40 VA
Sensor unit (L x W x H): 82 x 39 x 39 mm
Max. flow rate: 32 l/h
Max. delivery height: 15 m
Max. suction height: 3 m
Alarm switch: max. 230 V, 8 A (ohmic load)
 NO / NC (normally open / normally closed)
Alarm: max. 23 mm

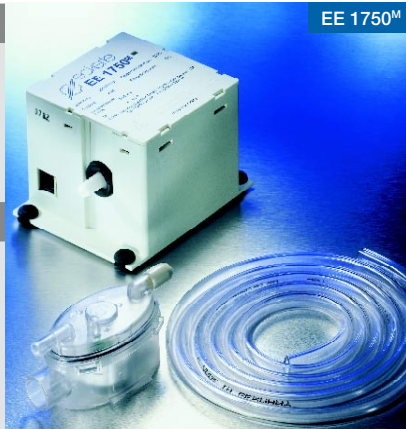

EE 1750^M

EE 1650^M

For air conditioners up to 30 kW

Pump
with integrated float switches and tank

Usage:

This compact unit with integrated float switch is designed to be used inside devices equipped only with a condensate collecting tank such as fan convectors, cabinet models, built-in units, water collection consoles etc. Steps must be taken to ensure that no fluid runs over the pump!

Description:

The delivery system is equipped with 2 separately operating float switches. The working float switch turns the pump on and off depending on the filling level (with run-on time).

The function of the alarm float switch is to isolate the break contact element.

Technical Data:

Pump unit (L x W x H): 244 x 174 x 144 mm
Electrical spec.: 230 V, 50/60 Hz, 40 VA
Max. flow rate: 32 l/h
Max. delivery height: 15 m
Tank capacity: 2 l
Alarm switch: 230 V, 8 A (ohmic load)
 NO / NC (normally open / normally closed)
Alarm: max. 53 mm



EE 1650^M

EE 150 EE 400^M EE 400^M Premium

For air conditioners up to 50 kW

Condensate pumps
with tank

Usage:

The Eckerle condensate pumps EE 150, EE 400^M and EE 400^M Premium are designed to remove condensate water out of air conditioners, evaporator coils and high efficient gas furnaces automatically. The pump housing is made from a tough fiber-reinforced nylon plastic body so it will resist corrosion and impact.

Technical Data EE 150:

Pump unit (L x W x H): 165 x 65 x 85 mm
Electrical spec.: 230 V, 50/60 Hz, 48 VA
Max. flow rate: 120 l/h
Max. delivery height: 1,5 m
Tank capacity: max. 0,2 l
Pressure hose Ø: 8 x 2 mm

Pump is supplied with cover

Description:

- Extremely quiet running and vibration-free
- Pump encapsulated and liquid cooled
- Protection class IP 55
- Max. medium temperature: 70° C
- Most compact design
- Pump housing made of glass-reinforced plastic material, including wall mounting accessory
- Separate alarm contact (only EE 400^M / EE 400^M Premium)
- Integrated check valve
- **EE 400^M Premium:** Version with additional alarm detector (special plug with integrated LED and buzzer), incl. 6 m PVC-tube

Technical Data EE 400^M / EE 400^M P:

Pump unit (L x W x H): 185 x 85 x 100 mm
Electrical spec.: 230 V, 50/60 Hz, 65 VA
Max. flow rate: 350 l/h
Max. delivery height: 4 m
Tank capacity: max. 0,5 l
Pressure hose Ø: 8 x 2 mm
Alarm switch: 230 V, 8 A (ohmic load)
 NO / NC (normally open / normally closed)

Pump unit can be used in an external pan as well
 Pan height: min. 62 mm
 max. 70 mm

EE 400^M Premium: Safety device visual and acoustical alarm



EE 150



EE 400^M

Condensate pumps

EE 900 EE 900 Basic

Usage:

The peristaltic pumps EE 900 / EE 900 Basic are designed to deliver condensate in noise-sensitive surroundings, e.g. in hotel and sleeping rooms. Referring to the resistivity against dry running and water borne contaminants the system is suitable for rooms with a high contamination of particles (e.g. hairdresser's shops). Independent of the delivery height the pump offers a constant flow rate of condensate water. The pump comes with an all-purpose mounting device, a check valve and a replacement tube.

Description:

EE 900: The EE 900 provides a thermal detection. The pump switches on when temperature difference between the two sensors exceeds 5° Celsius. If the detected temperature difference drops the pump offers a 3 minute over-run-time in order to evacuate the remaining condensate. Then the pump stops.

EE 900 Basic:

The EE 900 Basic peristaltic pump is designed to run constantly while the air conditioning system is cooling. The pump must be connected electrically to the main power supply (230 V / 50 Hz) and the separate control link to the air-conditioning units cooling signal.

Technical Data:

Pump unit (L x W x H): 90 x 115 x 137 mm
Electrical spec.: 230 V, 50/60 Hz, 10 VA
Max. flow rate: 6 l/h
Max. delivery height: 10 m
Max. suction height: 2 m

If the air conditioner stops running, the pump has a 3 minute over-run-time in order to evacuate the remaining condensate. Then the pump stops.









EE 900 Basic

For air conditioners up to 10 kW

Peristaltic pump

Performance Diagrams:

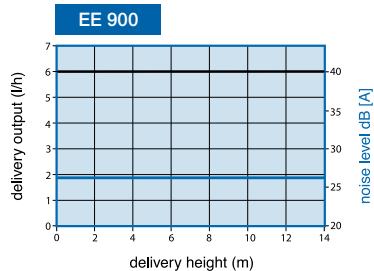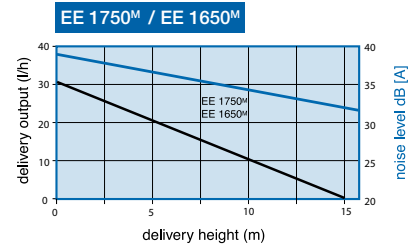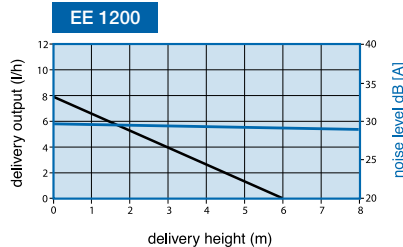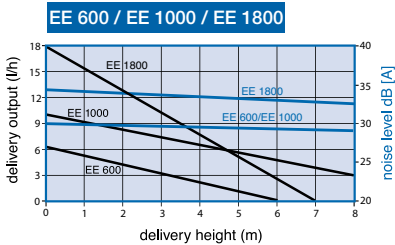

EFC 2A/ EFC 4A

Usage:

The EFC Fan Controller is suitable for all air cooled condensing units in air conditioning and refrigeration units with fan motor max. currents up to 2A resp. 4A (ohmic load).

Description:

The controller provides not only the correct speed for the outdoor fan, it also decides whether the fan should stop and for how long, to give an optimum control to the system. Furthermore the control avoids an over-condensing even with outdoor temperatures down to -20°C and no iced-up Indoor coils. Due to decreased compressor running time, a higher efficiency will be achieved.

Technical Data:

EFC 2A Dimensions (L x W x H):

104 x 68 x 39 mm

EFC 4A Dimensions (L x W x H):

123 x 79 x 33 mm

Electrical spec.: 230 V, 50 Hz

Electrical load: Fan Motor max. current 2A/4A (ohmic load)

Regulation: Phase modulation according sensor temperature and set point 0% or 40% to 100%

at 0%, the fan is off

at 40%, the fan speed is minimum

at 100%, the fan speed is maximum

Sensor: Fixation with mounted releasable tie cable length approx. 1 m ends with caps



EFC 4A

Intelligent control for air conditioners

Electronic Fan Controller

Accessories:

- extension cable 3 m (EE 600, EE 1000, EE 1800, EE 1750^M)
- extension cable 5 m (EE 600, EE 1000, EE 1800, EE 1750^M)
- extension cable 10 m (EE 600, EE 1000, EE 1800, EE 1750^M)
- PVC tube (EE 600, EE 1000, EE 1800, EE 1750^M u. EE 1650^M) 50 m roll, inside ø 6 mm x 1.5 mm
- PVC tube (EE 400^M u. EE 150) 50 m roll, inside ø 8 mm x 2 mm
- Inline filter (EE 600, EE 1000, EE 1800, EE 1750^M)
- Check valve (EE 600, EE 1000, EE 1800, EE 1750^M, EE 1650^M)
- Santoprene®-replacement tube for EE 900 incl. tube connectors

order-no.	22003
order-no.	22005
order-no.	22010
order-no.	22150
order-no.	0505050024
order-no.	21757
order-no.	22011
order-no.	9704010008